



# WICANDERS

Everyday comfort.  
Lifetime performance.

AMORIM CORK FLOORING



Created by Humans,  
Inspired by Nature

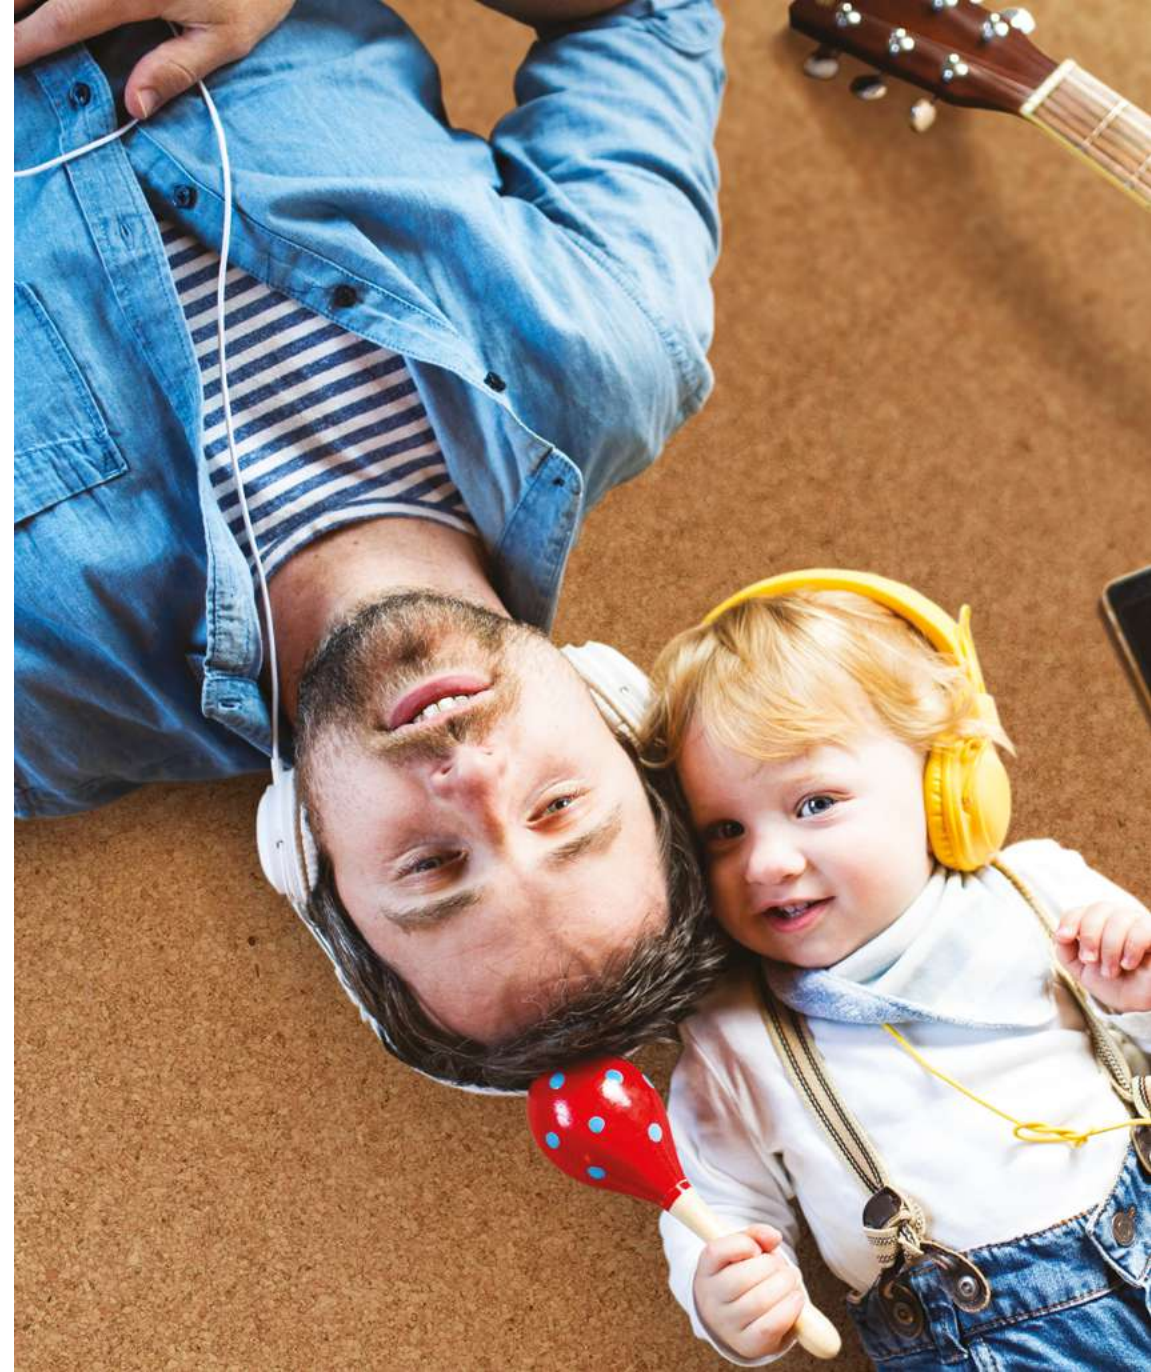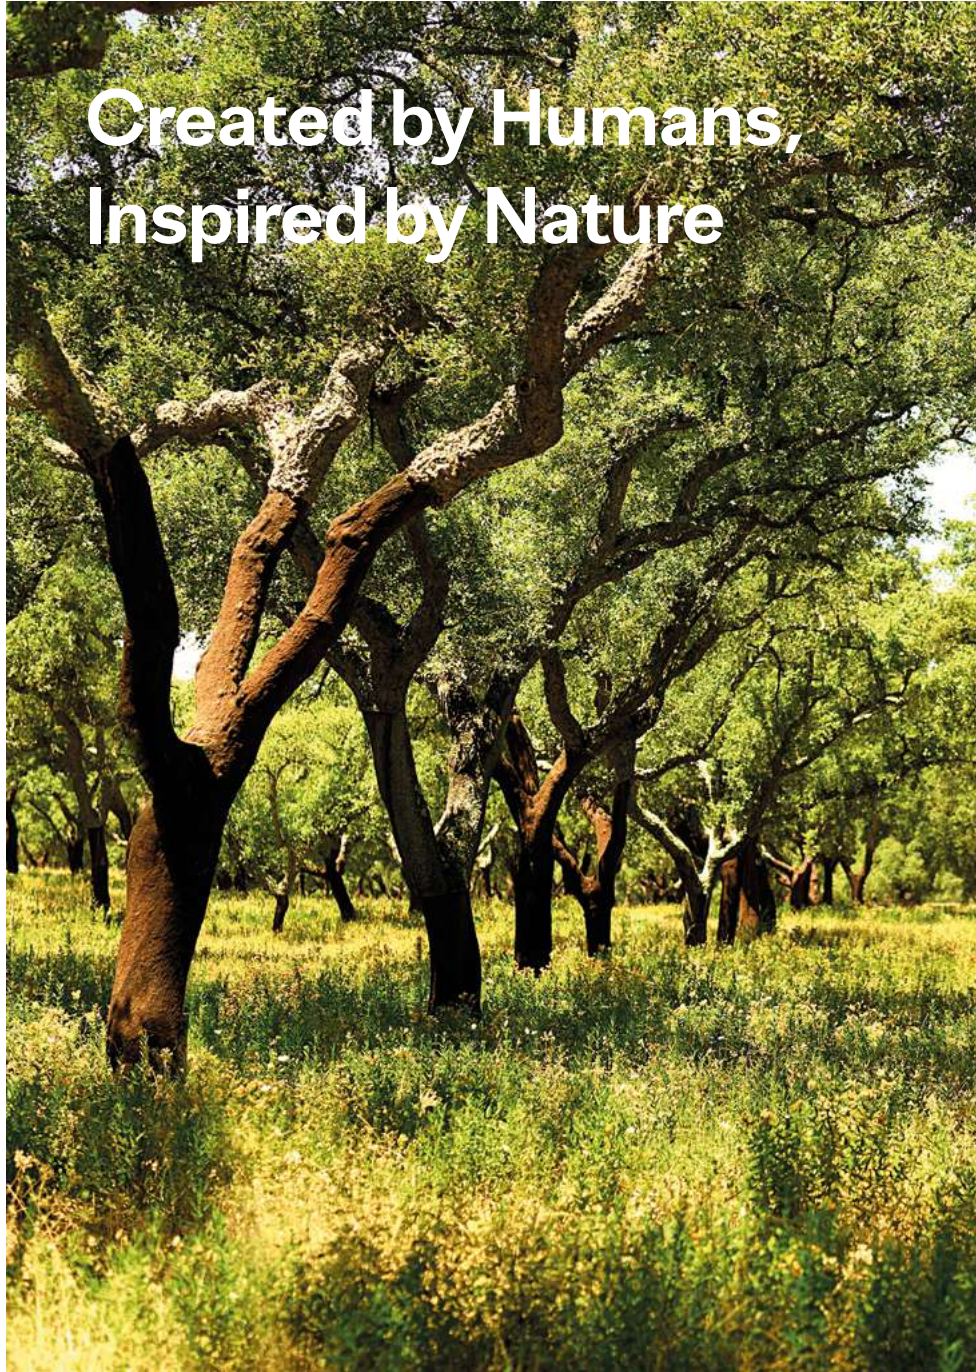





# WICANDERS

Wicanders has a legacy that goes back to 1868. It is part of Amorim Cork Flooring, the global leading brand in cork-based flooring, present in more than 80 countries worldwide. Its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets. For all those wonderful and simple, yet sometimes unexpected moments, due to Wicanders durability and **performance**.

Over the years, Wicanders has developed sustainable flooring and wall coverings with exclusive properties due to its cork benefits. By combining state of the art technology with the exclusive natural properties of cork, a higher standard of **comfort** in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment that endures impacts and is very comfortable to walk and stand on.

**Wicanders means  
everyday comfort, lifetime performance.**

---

AMORIM CORK FLOORING



An aerial photograph of a serene landscape. On the left, a calm body of water reflects the sky. To the right, a grassy bank slopes down towards the water, dotted with several mature trees. The trees cast long, dark shadows across the dry, yellowish-green grass. In the distance, more trees and a small herd of animals are visible on the opposite bank. The overall scene conveys a sense of natural beauty and tranquility.

# CORK: Inspired by Nature

Inspired by Nature, Wicanders represents a unique balance between the creation of innovative products and the protection of the environment.

One of cork's most extraordinary properties can be found in its biological origins. In fact, extracting cork does not harm the tree that it comes from. It is removed every nine years, and not a single tree is cut down in the process.

Cork is the outer bark of the cork oak tree (*Quercus suber* L.), a slowly growing tree from the Mediterranean with a lifespan of around 200 years and plays a central role in the environmental, economic and social development of this region.

With unique properties, cork is 100% natural and fully biodegradable, renewable and recyclable.





**9 YEARS**

The period of time  
between each cork oak  
harvesting.

**100.000**

Direct and indirect jobs  
are created by the cork  
industry.

**NO TREES  
ARE DAMAGED**

Or cut down.

**CO<sub>2</sub>  
RETENTION**

The cork oak tree retains  
5x more CO<sub>2</sub> from the  
atmosphere than any other  
tree, helping to reduce  
Global Warming Potential.

**CORK  
HARVESTING**

Is the highest paid  
agricultural job in the  
world.

**200 YEARS**

The average lifespan of a  
cork oak tree.

## Sustainable by heart

### ENVIRONMENT



#### No Trees are damaged or cut down during the harvesting

The extraction of cork and its related industries are remarkably sustainable, since the tree is never cut down or damaged during the extraction process and the bark regenerates itself after each harvesting.



#### Positive ecological impact

The cork oak tree retains 5x more CO<sub>2</sub> from the atmosphere than any other tree, helping to reduce Global Warming Potential (GWP).

### ECONOMY



#### Rural areas economic engine

The cork oak forest is essential for the economic development of rural areas in the Mediterranean region, by creating jobs and activities related to the harvesting and treatment of cork. WWF estimates that more than 100,000 people are economically dependent of cork-related business activities.



#### Highest paid agricultural job

Cork harvesting is an activity that requires experience and high skills, to prevent damaging the tree during the process. Therefore this activity is the highest paid agricultural job in the world.

### SOCIAL



#### Crossing generations

More than a job, harvesting is a handcraft work that requires a deep knowledge of the forest and the technique. Thus to be able to perform this activity takes several years of training, a know-how that crosses family generations.



#### Prevent rural desertification

Cork harvesting is a regular and cyclical process, creating a continuous activity that contributes to settle people in areas at risk of desertification.




# From Nature, to your special space.

Our products are designed to resist under the toughest conditions, always with incredible stability and exceptional **performance**.

Cork offers a world of **comfort** to be discovered by your feet.

## WALKING SOUND




## Silence

Reduces the walking sound up to 53%.



## Impact Resistance

Highest shock absorbing performance.

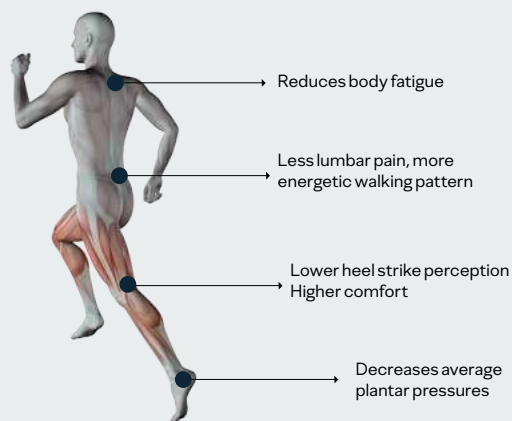

## Walking Comfort

Wicanders cork floors are the perfect mix to reduce heel strike impacts and related body tensions, but stable enough to help the foot impulse and provide the needed stability to reduce effort on walking and decrease body fatigue.







## Indoor Air Quality


Compliance with the strictest indoor air quality standards after being **tested on over 2000 potential chemicals.**



## Natural Thermal Insulation

Optimal floor temperature all year round.

### INFRARED FOOT TEMPERATURE

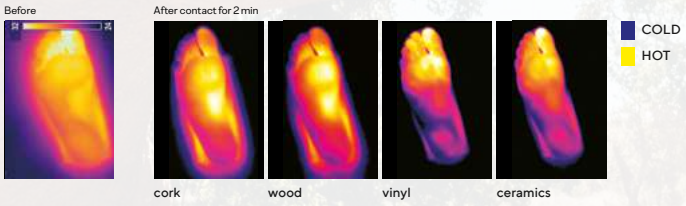



## cork

Go	10
Essence	16

## wood

Go	38
Essence	46
Resist	54
Resist Eco	64
Hydrocork	74

## stone

Essence	91
---------	----







**cork**

A world of solutions  
at your feet.



# cork

## Go


Developed to be an easy and practical floor with the unique beauty of timeless cork designs that gives a seamless look to the floor. A sustainable product that is ideal for residential use. Cork Go takes advantage of the thermal and acoustical benefits as well as its ease of maintenance and outstanding comfort when walking barefoot.

### Formats

905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"



Dream

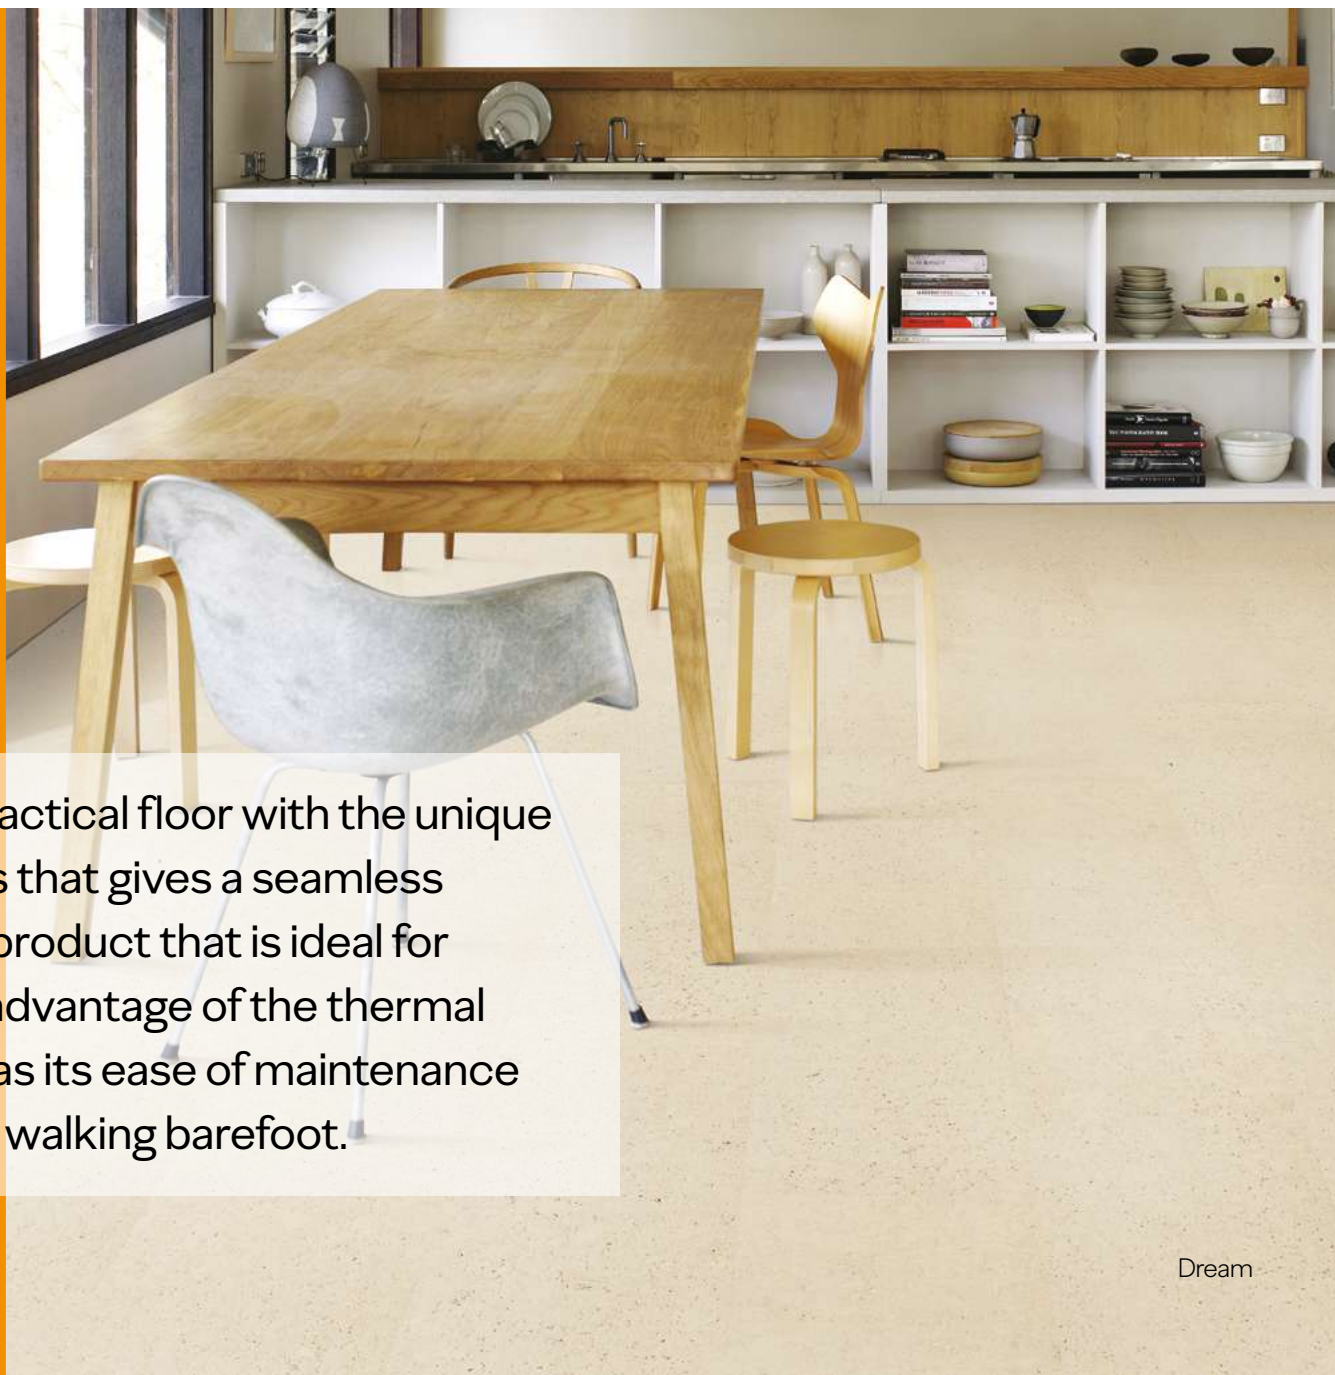





Addict

C87W001  
905 x 295 x 10,5mm



Aspiration

C82Y001  
905 x 295 x 10,5mm



Seduction

C82R001  
905 x 295 x 10,5mm



Gloomy

C87X001  
905 x 295 x 10,5mm



Affection

C87V001  
905 x 295 x 10,5mm



Blase

C8D2001  
905 x 295 x 10,5mm



Whim

C822001  
905 x 295 x 10,5mm



Serenity

C87Y001  
905 x 295 x 10,5mm





## Moment

GA01002  
905 x 295 x 10,5mm



## Emotion

GB08002  
905 x 295 x 10,5mm



## Captivation

C824001  
905 x 295 x 10,5mm



## Attraction

GB03002  
905 x 295 x 10,5mm

## Class

# Dance, laugh, play freely!

When it comes to choosing the ideal flooring for a home, there is no better option than cork floors. Perfect for ones who want the comfort while walking around barefoot, playing freely. Sound reduction helps keep the home quiet and calm. Chose the most suitable and beautiful look for your home.







Desire



Desire

GA21003

905 x 295 x 10,5mm







Dream

GB05003  
905 x 295 x 10,5mm



Impulse

GB09002  
905 x 295 x 10,5mm



Charm

GB01003  
905 x 295 x 10,5mm



Allure

GB02002  
905 x 295 x 10,5mm



Ambition

GB06002  
905 x 295 x 10,5mm



Appeal

GB10002  
905 x 295 x 10,5mm



Intense

GB11002  
905 x 295 x 10,5mm





# Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

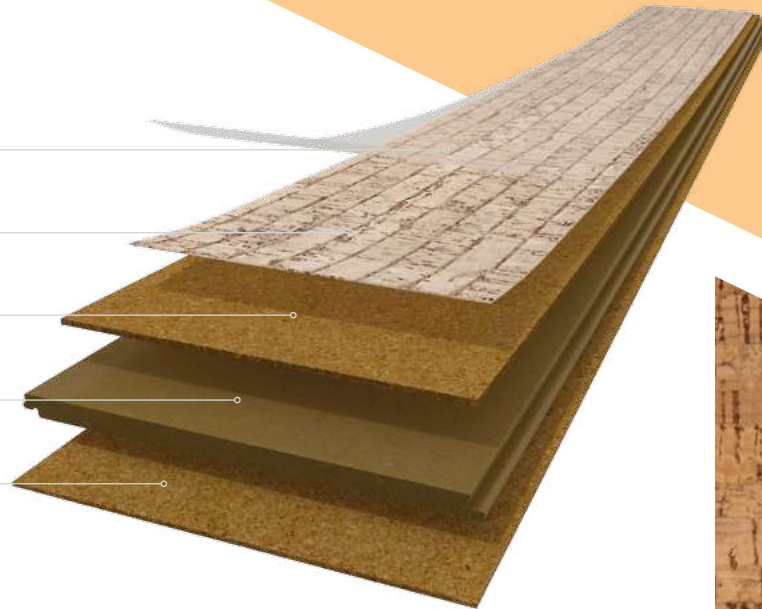

## Finishing & Warranty



XtraMatt surface has a unique natural look and feel, combined with the resistance and performance of a UV finish, focused on environmental friendly properties and ease of maintenance.



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



7 POINTS



# cork

## Essence

Rich in style, charm and sophistication, Cork Essence expresses its personality through the unique designs and formats aligned with modern interior design trends. In harmony with nature, each board is unique. The ideal floor for creating ambiances full of charm, combined with the unique comfort of cork and the performance requirements of residential and light commercial applications.

### Formats

905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"

1220 x 185 x 10,5mm  
48 1/32 x 7 9/32 x 13/32"



Traces Champagne







Identity Moonlight

I801002

905 x 295 x 10,5mm



Identity Champagne

I805002

905 x 295 x 10,5mm



Identity Timide

I802002

905 x 295 x 10,5mm



Identity Eden

I806002

905 x 295 x 10,5mm



Identity Silver

I803002

905 x 295 x 10,5mm



Identity Tea

I810002

905 x 295 x 10,5mm




**cork** Essence



## Lane Chestnut


C83S003

1220 x 185 x 10,5mm 4  1mm



## Lane Timide

C83R002

1220 x 185 x 10,5mm 4  1mm




Traces Chestnut





Traces Moonlight


C85P002

1220 x 185 x 10,5mm 4  1mm



Traces Champagne


C85O002

1220 x 185 x 10,5mm 4  1mm



Traces Chestnut


C85R002

1220 x 185 x 10,5mm 4  1mm



Traces Spice


C84N001

1220 x 185 x 10,5mm 4  1mm



Traces Tea

C84M001

1220 x 185 x 10,5mm 4  1mm





## Flock Champagne

C81Y002

1220 x 185 x 10,5mm

4  1mm



## Flock Tea

C83Z004

1220 x 185 x 10,5mm

4  1mm



## Flock Chestnut

C84A004

1220 x 185 x 10,5mm

4  1mm



## Class

# When Nature meets charm

In modern interior design, the creation of spaces with style and personality starts with beautiful and expressive floors. Aligned with the market trends, our team of experts has created an unique Class collection that combines different shapes of natural Cork.

Rich in style, charm and sophistication, and in harmony with nature, Class also provides an unmatched wellbeing that will for sure be very pleasant when getting together with family and friends.

Light coloured flooring like Flock Moonlight is the splendid background for soft colours and it will balance smoothly your classic and modern furniture with a minimalistic look.





Flock Moonlight



## Flock Moonlight

C81X004

1220 x 185 x 10,5mm

4  1mm






**cork** Essence



Reed Meridian

C83T003

1220 x 185 x 10,5mm 4  1mm



Personality Timide

P802002

905 x 295 x 10,5mm



Reed Barley

C83U003

1220 x 185 x 10,5mm 4  1mm



Personality Eden


P806002

905 x 295 x 10,5mm



Personality Eden



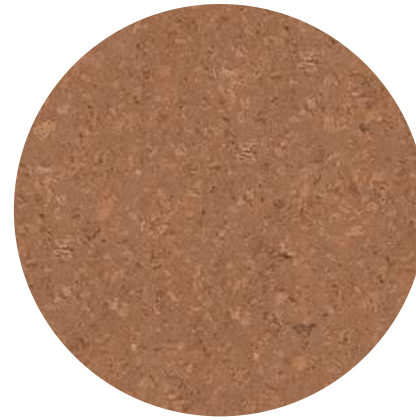

Personality Spice

P808002


905 x 295 x 10,5mm



Personality Chestnut

P832002

905 x 295 x 10,5mm

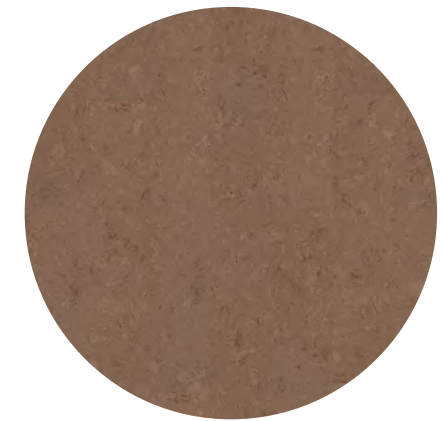

Personality Tea

P810002

905 x 295 x 10,5mm





Identity Chestnut

I832002

905 x 295 x 10,5mm



Identity Nightshade

I821002

905 x 295 x 10,5mm





## Originals Natural

O801007

905 x 295 x 10,5mm



## Originals Shell

O824003

905 x 295 x 10,5mm



Originals Shell





Originals Dawn

O849003  
905 x 295 x 10,5mm



Originals Accent

O841002  
905 x 295 x 10,5mm



Originals Character

O822002  
905 x 295 x 10,5mm



Originals Harmony

O821005  
905 x 295 x 10,5mm



Originals Symphony

O830003  
905 x 295 x 10,5mm





Originals Country

O832004  
905 x 295 x 10,5mm



Originals Rhapsody

O825005  
905 x 295 x 10,5mm





## Fashionable Antracite

C88Q001  
905 x 295 x 10,5mm



## Fashionable Mystic

C85K001  
905 x 295 x 10,5mm



Fashionable Antracite





Fashionable Antique  
White

C88K001  
905 x 295 x 10,5mm



Fashionable Glacier

C85J001  
905 x 295 x 10,5mm



Fashionable Cement

C85L001  
905 x 295 x 10,5mm



Fashionable Macchiato

C85N001  
905 x 295 x 10,5mm



Fashionable Camel

C88O001  
905 x 295 x 10,5mm



Fashionable Marfim

C88P001  
905 x 295 x 10,5mm



Fashionable Jasmim

C88N001  
905 x 295 x 10,5mm



Fashionable Grafite


C85M001  
905 x 295 x 10,5mm





Personality Moonlight

P801002  
905 x 295 x 10,5mm

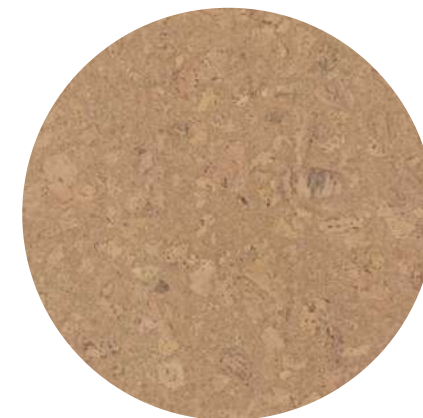

Personality Champagne

P805002  
905 x 295 x 10,5mm





Tweedy Wood Coffee



Tweedy Wood Coffee

C86I001

905 x 295 x 10,5mm



Tweedy Wood Timide

C86H001

905 x 295 x 10,5mm





Novel Brick Natural

C8G1001  
905 x 295 x 10,5mm



Novel Brick Flax

C86T001  
905 x 295 x 10,5mm



Novel Brick Drill

C86S001  
905 x 295 x 10,5mm



Novel Brick Taffeta

C86R001  
905 x 295 x 10,5mm





Novel Edge Burlap



Novel Edge Natural

C8G2001  
905 x 295 x 10,5mm



Novel Edge Lace

C86W001  
905 x 295 x 10,5mm



Novel Edge Drill

C86V001  
905 x 295 x 10,5mm



Novel Edge Burlap

C86U001  
905 x 295 x 10,5mm





Linn Blush

C81O003  
905 x 295 x 10,5mm



Linn Moon

C81N002  
905 x 295 x 10,5mm



Linn Cioccolato

C81L003  
905 x 295 x 10,5mm



Linn Moon



# Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

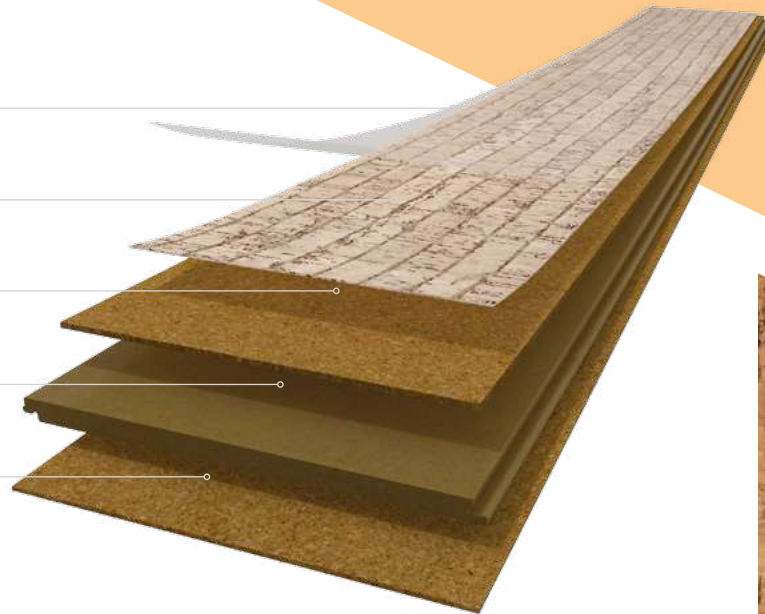

## Finishing & Warranty



XtraMatt+ surface is a High Resistance Acrylic UV finish suitable for residential and light commercial areas. It enhances the natural beauty and environmental friendly properties of cork floors, while assuring a high performance for a long time.



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



7 POINTS



## Technical Data Sheet

Floating			cork Go	cork Essence
Dimention			905 x 295 x 10,5mm   35 5/8x11 5/8x3/8"	905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 1220 x 185 x 10,5mm   48 1/32x7 9/32x13/32"
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	--	31
Finish Description	--	--	XTRAMATT	XTRAMATT+
	Standard-Test Method	Unit	Specification	
General Properties - EN 14085 + EN 12104 + EN 655				
Dimensions: Width Length	EN ISO 24346	mm	± 0,10% up to max. 0,5 max. 2,0	± 0,10% up to max. 0,5 max. 2,0
Overall thickness	EN ISO 24342	mm	± 0,25	± 0,25
Squareness	EN ISO 24342	mm	≤ 0,50	≤ 0,50
Straightness measured at the surface layer	EN ISO 24346	mm	≤ 0,30	≤ 0,30
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15	≤ 0,10 / ≤ 0,15
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20	≤ 0,20
Dimensional stability (humidity)	EN 669 (Annex C)	%	≤ 5	≤ 5
Mass per unit area	ISO 23997	g/m²	Nominal Value (8000) -10%; +13%	Nominal Value (8000) -10%; +13%
Classification Properties - EN 14085 + EN 12104 + EN 655				
Nominal thickness for cork surface	EN ISO 24340	mm	≥ 2,5	≥ 3,0
Castor Chair	EN 425	Visual effect after 25 000 cycles	--	No disturbance to the surface other than slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	--	No damage shall be visible after testing with a type 2 foot
Residual indentation	EN ISO 24343-1	mm	≤ 0,40	≤ 0,40
Safety Properties - EN 14041				
Fire resistance	EN 13501-1	Class	E fl-s1	C fl-s1
Slip classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Electrical behaviour	EN 1815	KV	Not Antistatic	Not Antistatic
Content pentachlorophenol (PCP)	EN 14041 (Annex B)	mg/Kg	PCP Free	PCP Free
Optional Properties				
Stains resistance	ISO 26987	Grade	Grade 0 (iodine: Grade 3) (a1) (b1)	Grade 5 (NaOH Grade 4) (a2) (b2)
Thermal resistance	EN 12667	(m²K)/W	R≤ 0,150	R≤ 0,150
Impact sound reduction	ISO 140-8	dB (ΔLw)	--	16
Reduction improvement	EPH/IHD Works Standard 431	dB(A)	--	13.2
Difference of loudness		%	--	51.6

(a1) The following products were tested: Desinfectant, Petroleum spirit, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, Citric acid and Iodine.(a2) The following products were tested: acetone, coffee, NaOH, H<sub>2</sub>O<sub>2</sub>, shoe polish.

(b1) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong change.

(b2) Grade 5 - no visible change / Grade 4 - very minor changes / damages at the surface / Grade 3 - minor changes / damages at the surface / Grade 2 - Strong changes / damages at the surface / Grade 1 - Surface destruction.



A young girl with brown hair, wearing a yellow tank top, is lying on her side on a light-colored wooden floor. She is holding a small black and white puppy close to her face. The background is slightly blurred, showing a wooden chair and a window with soft light coming through. The overall mood is warm and cozy.

**wood**

Be different.


Stay in your comfort zone.

# wood Go

Floating floor with classic wood visuals and a multilayered structure. Composed by cork for added performance in terms of thermal and acoustical insulation to the product. This practical solution is ideal for ones that like the beauty of wood combined with an easy to maintain and scratch resistant surface.

## Formats

1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"

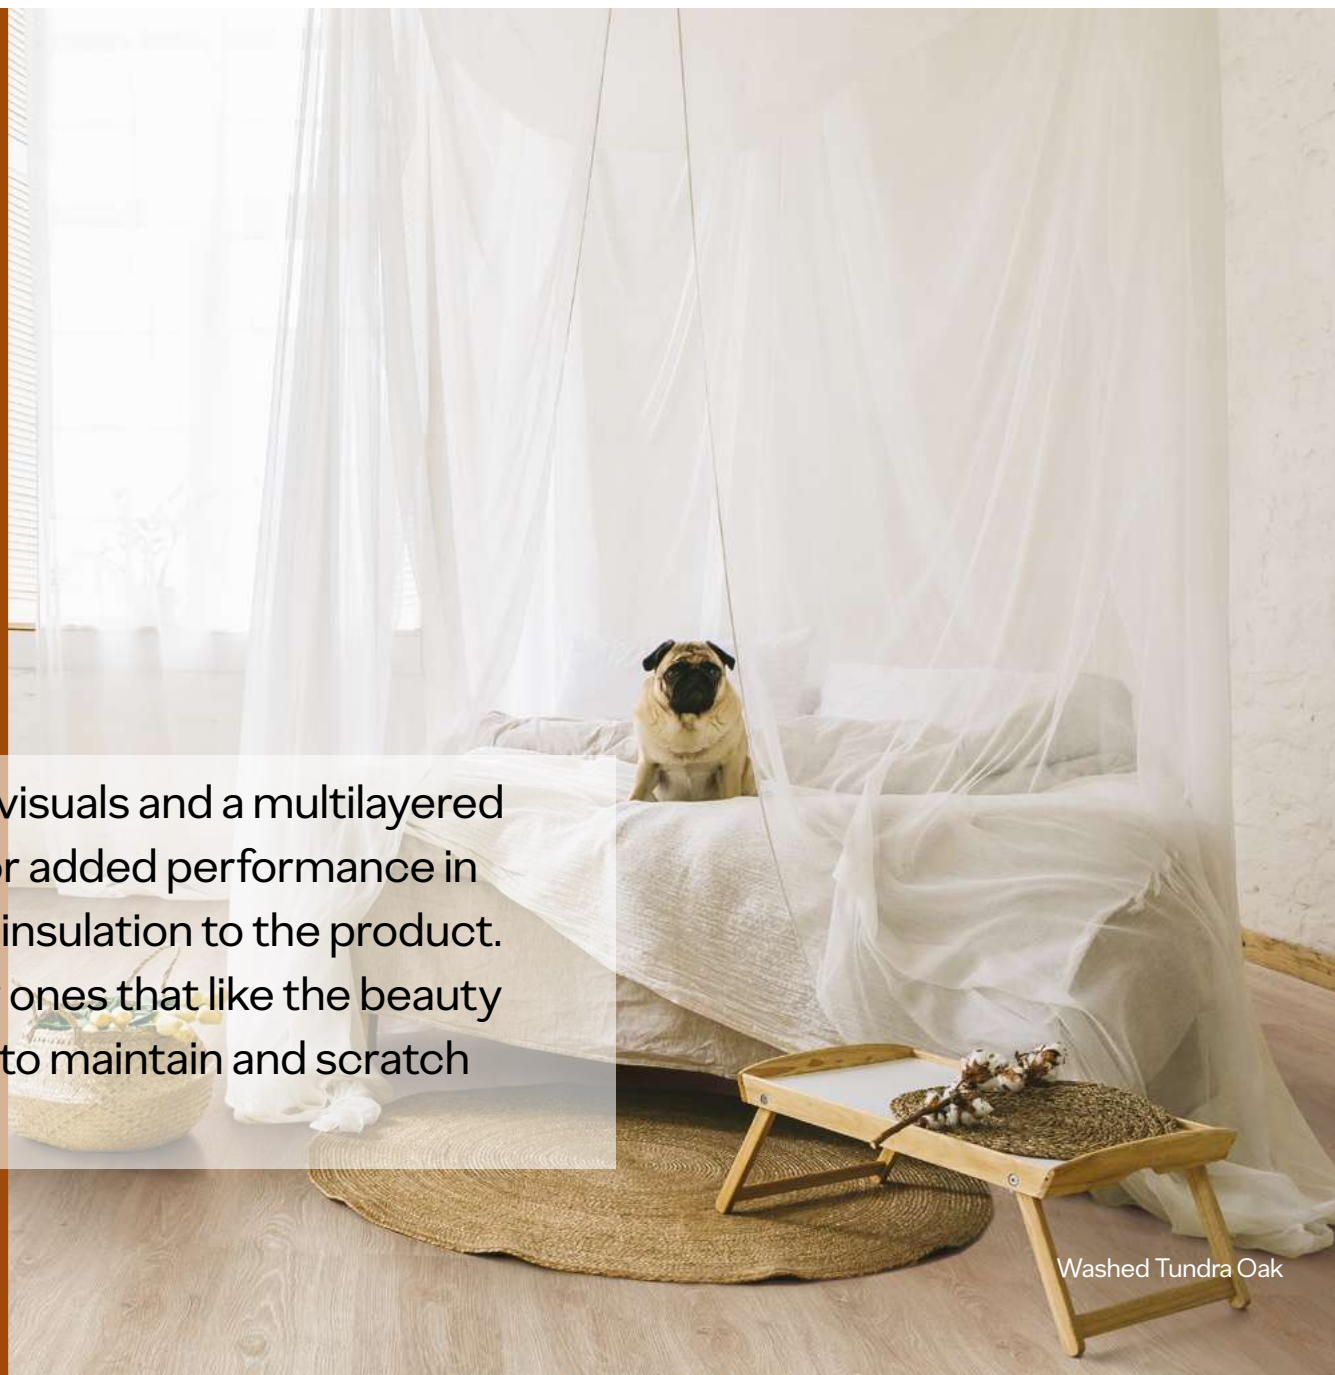

Washed Tundra Oak





Classic Nature Oak

BOS3001

1220 x 185 x 10,5mm | 0,2mm 



Indian Dark Oak


BOS5001

1220 x 185 x 10,5mm | 0,2mm 



Ivory Salt Oak


BON2001

1220 x 185 x 10,5mm | 0,2mm 



Storm Oak


BON3001

1220 x 185 x 10,5mm | 0,2mm 



Natural Larch


BOW5001

1220 x 185 x 10,5mm | 0,2mm 



Old Larch


BOW6001

1220 x 185 x 10,5mm | 0,2mm 



Quartz Larch

BOW3001

1220 x 185 x 10,5mm | 0,2mm 





Savanna Limed Oak

BON6001

1220 x 185 x 10,5mm | 0,2 mm



Pastel Oak

BOVI001

1220 x 185 x 10,5mm | 0,2 mm








Rustic Taupe Oak


BOWC001

1220 x 185 x 10,5mm | 0,2 mm 



Caribbean Oak


BOWX001

1220 x 185 x 10,5mm | 0,2 mm 



Argent Oak

BOVB001

1220 x 185 x 10,5mm | 0,2 mm 



Linen Oak


BOVC001

1220 x 185 x 10,5mm | 0,2 mm 



Almond Oak


BOVJ001

1220 x 185 x 10,5mm | 0,2 mm 



Limed White Rustic Oak


BOWB001

1220 x 185 x 10,5mm | 0,2mm 



Fall Pine


BOS0001

1220 x 185 x 10,5mm | 0,2mm 



Highland Pine

BOS1001

1220 x 185 x 10,5mm | 0,2mm 



Polar Nature Oak


BOR9001

1220 x 185 x 10,5mm | 0,2mm 



Oiled Taupe Oak

BOWA001

1220 x 185 x 10,5mm | 0,2mm 








Chalk Oak



Frozen Oak


B0N9001

1220 x 185 x 10,5mm | 0,3 mm 



Light Sucupira


B0O9001

1220 x 185 x 10,5mm | 0,3 mm 



Chalk Oak


B0Q1003

1220 x 185 x 10,5mm | 0,3 mm 



Alaska Oak

B0Q0003

1220 x 185 x 10,5mm | 0,3 mm 




Washed Moon Oak



Washed Desert Oak


BOVP001

1220 x 185 x 10,5mm | 0,2 mm 



Washed Tundra Oak


BOVK001

1220 x 185 x 10,5mm | 0,2 mm 



Washed Moon Oak

BOVM001

1220 x 185 x 10,5mm | 0,2 mm 



# Technical solution

PROTECTIVE WEAR LAYER


HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

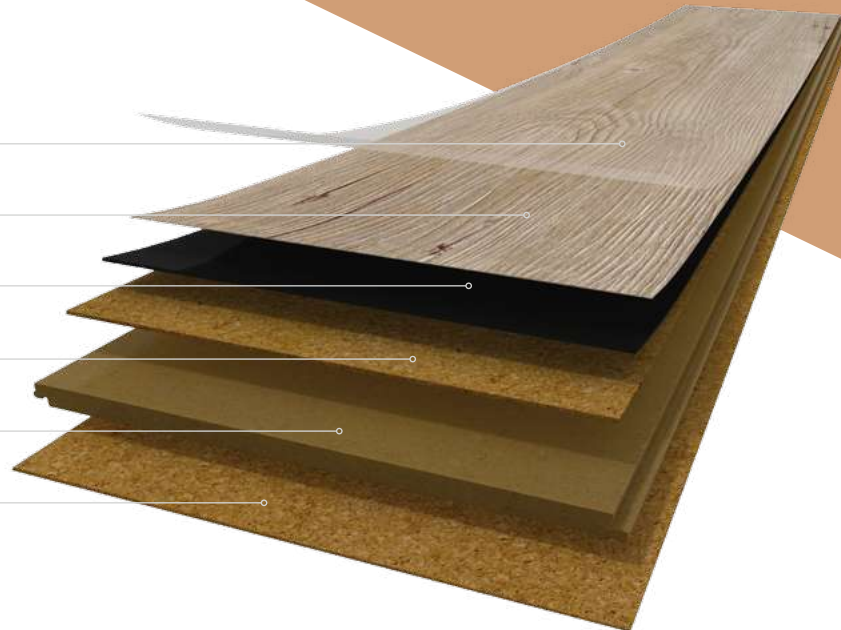

Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).

# Finishing & Warranty



Suitable for Heavy Traffic Residential areas and Moderate Traffic Commercial areas.



Suitable for Heavy Traffic Residential areas and Medium Traffic Commercial areas.



5 POINTS



8 POINTS

# wood Essence

Length is an important design element for those that prefer a more sophisticated and contemporary environment. Wood Essence offers the beauty of long plank wood looks with a multilayered structure composed by cork that provides a higher standard in terms of stability, performance and walking comfort. The 3,2mm cork top layer will provide an exceptional thermal and acoustic insulation and a natural look and feel.

## Formats

1830 x 185 x 11,5mm  
72 x 7 1/4 x 1/2"



Washed Highland Oak





NEW

Classic Nordic Pine

D8H6001

1830 x 185 x 11,5mm

4  1mm



NEW

Classic Sucupira

D8H8001

1830 x 185 x 11,5mm

4  1mm



NEW

Classic Walnut

D8H7001

1830 x 185 x 11,5mm

4  1mm



Prime Rustic Oak

D884004

1830 x 185 x 11,5mm

4  1mm



Country Prime Oak

D8F8001

1830 x 185 x 11,5mm

4  1mm





Prime Desert Oak

D8F5001

1830 x 185 x 11,5mm

4  1mm



Classic Prime Oak

D8F4001

1830 x 185 x 11,5mm

4  1mm



Prime Arctic Oak

D8F6001

1830 x 185 x 11,5mm

4  1mm



Dapple Oak

D8F1001

1830 x 185 x 11,5mm

4  1mm







Platinum Chalk Oak



Golden Prime Oak

D8F7001

1830 x 185 x 11,5mm

4  1mm



Nebula Oak

D8F3001

1830 x 185 x 11,5mm

4  1mm



Platinum Chalk Oak

D886003

1830 x 185 x 11,5mm

4  1mm



Coal Oak

D8F2001

1830 x 185 x 11,5mm

4  1mm



Nebraska Rustic Pine



## Nebraska Rustic Pine

D885003

1830 x 185 x 11,5mm

4  1mm

4  1mm

4 sides beveled | 1mm





Rustic Forest Oak

D8G0001

1830 x 185 x 11,5mm



Rustic Eloquent Oak

D8F9001

1830 x 185 x 11,5mm



Ivory Chalk Oak

D887004

1830 x 185 x 11,5mm



Ivory Chalk Oak



Washed Haze Oak

D8G2001

1830 x 185 x 11,5mm



Washed Arcaine Oak

D8G1001

1830 x 185 x 11,5mm



Washed Highland Oak

D8G3001

1830 x 185 x 11,5mm



Washed Castle Oak

D8G4001

1830 x 185 x 11,5mm





# Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

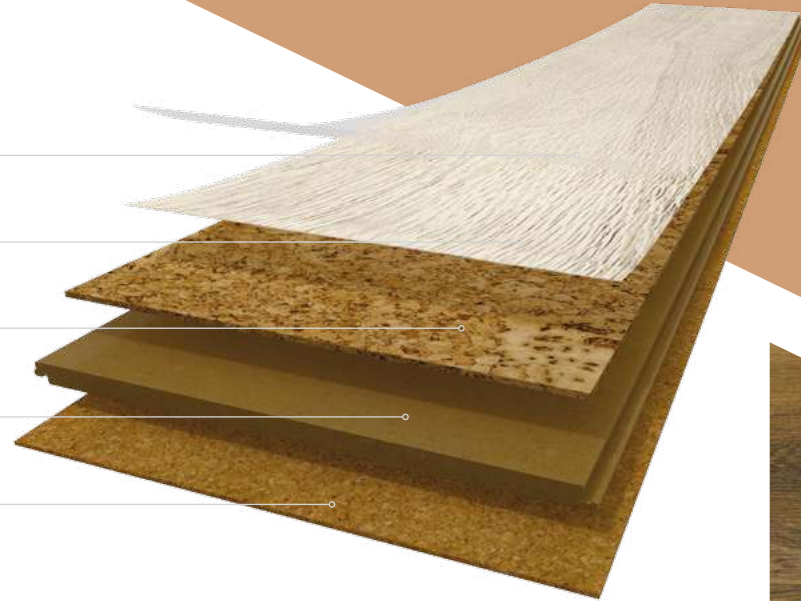

## Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). Due to its chemical reaction during the hot coating process it is extremely wear resistant and highly flexible. This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



8 POINTS

# wood Resist

Designed to be resistant to the high traffic commercial areas, this floating floor solution is easy to install, absorbs subfloor irregularities and delivers an excellent technical performance. The wood visual with traditional patterns are the best choice for those who want spaces full of class, but with the unmatched comfort of cork and a worry free heavy duty surface.

## Formats

1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"



Nature Oak







Wheat Oak

BOWR001

1220 x 185 x 10,5mm

4 | 0,7mm



Arcadian Artic Pine

BOWT001

1220 x 185 x 10,5mm

4 | 0,7mm



Linen Cherry

BOR0001

1220 x 185 x 10,5mm

4 | 0,7mm



Sand Oak

BOR1001

1220 x 185 x 10,5mm

4 | 0,7mm



Elegant Oak

BOR4001

1220 x 185 x 10,5mm

4 | 0,7mm




Castle Raffia Oak





Castle Raffia Oak


B0P0001

1220 x 185 x 10,5mm 4  | 0,7mm



Light Beech

B0T0002

1220 x 185 x 10,5mm 4  | 0,7mm



Wheat Pine

B0R3001

1220 x 185 x 10,5mm 4  | 0,7mm





## Limed Grey Oak

B0T7001

1220 x 185 x 10,5mm

4  10,7mm



## Claw Silver Oak

B0V3001

1220 x 185 x 10,5mm

4  10,7mm



Claw Silver Oak



## Nordic

# Creating solutions. Reinventing comfort.

When choosing the perfect hue and look of flooring for your special space, you will consider if it matches your personal style in a timeless manner, and also if it will endure the test of time.

Wicanders products are impact resistant, sound and thermal insulators, so it's guaranteed that a sense of wellbeing meets what's offered to the eyes.


Your bedroom will be the perfect hideaway to the busy day-to-day life with a design and serene atmosphere.



## Rustic Limed Gray Oak

B0U0001

1220 x 185 x 10,5mm

4  0,7mm



## Cinder Oak

B0R7001

1220 x 185 x 10,5mm

4  0,7mm





Arcadian Soya Pine

BOP4001

1220 x 185 x 10,5mm

4  | 0,7mm



Arcadian Rye Pine

BOP5001

1220 x 185 x 10,5mm

4  | 0,7mm



Nature Oak

BOT5001

1220 x 185 x 10,5mm

4  | 0,7mm



Century Fawn Pine

BOP7001

1220 x 185 x 10,5mm

4  | 0,7mm








Century Morocco Pine



Castle Toast Oak

BOP1001

1220 x 185 x 10,5mm


4  10,7mm



Century Morocco Pine

BOP6001

1220 x 185 x 10,5mm

4  10,7mm



Nordic Ash

BOV4001

1220 x 185 x 10,5mm

4 M | 0,7mm



Sawn Twine Oak

BOP2001

1220 x 185 x 10,5mm

4 M | 0,7mm



Sawn Bisque Oak

BOP3001

1220 x 185 x 10,5mm

4 M | 0,7mm

Sawn Twine Oak



# Technical solution

PROTECTIVE WEAR LAYER


HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

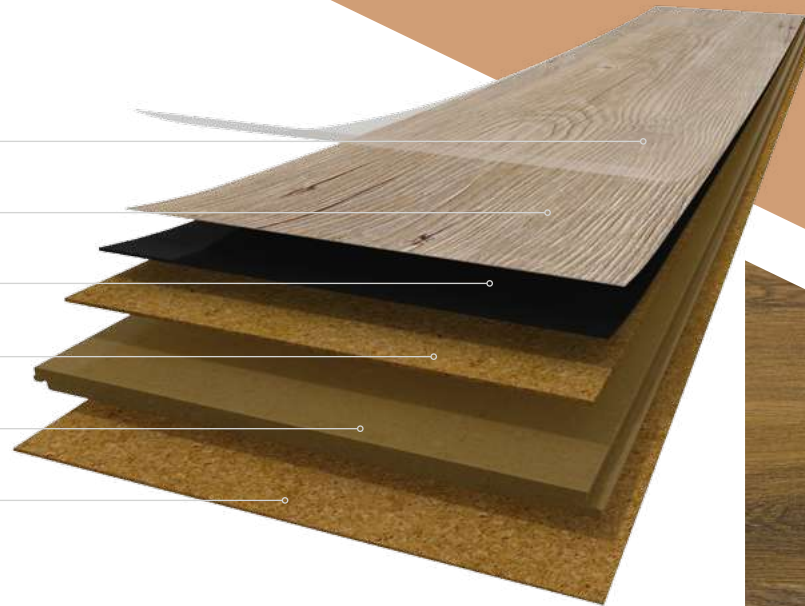

# Finishing & Warranty



Suitable for Heavy Traffic Residential areas  
and Heavy Traffic Commercial areas.



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



8 POINTS

# wood

## Resist ECO

PVC Free surface available in an extensive collection of wood visuals. Designed to withstand the needs of our daily lives and commercial areas due to its wear resistance and indoor air quality credentials. The extra thick cork top layer gives the product an outstanding comfort, while reducing the walking sound. The perfect combination between the beauty of wood and the performance, stability, comfort and ease of maintenance.

### Formats

1220 x 185 x 10,5mm  
48 x 7 1/4 x 3/8"



Mountain Oak







**NEW**

Field Oak

FDYG001

1220 x 185 x 10,5mm

4  0,7mm



**NEW**

Manor Oak

FDYE001

1220 x 185 x 10,5mm

4  0,7mm



**NEW**

Mocca Oak

FDYL001

1220 x 185 x 10,5mm

4  0,7mm



**NEW**

Mountain Oak

FDYA001

1220 x 185 x 10,5mm

4  0,7mm




**NEW**

Ocean Oak

FDYF001

1220 x 185 x 10,5mm

4  0,7mm



**NEW**

Quartz Oak

FDYM001

1220 x 185 x 10,5mm

4  0,7mm



**NEW**

Royal Oak

FDYD001

1220 x 185 x 10,5mm

4  0,7mm



NEW

## Sprucewood

FDYB001

1220 x 185 x 10,5mm

4  0,7mm




Sprucewood






Alpine Ash

1220 x 185 x 10,5mm 4  10,7mm



Frozen Oak

1220 x 185 x 10,5mm 4  10,7mm




Antique Frozen Pine

1220 x 185 x 10,5mm 4  10,7mm




Cinder Oak

1220 x 185 x 10,5mm 4  10,7mm



## Grey Washed Oak

1220 x 185 x 10,5mm

4  10,7mm



Grey Washed Oak





NEW

Limed Grey Oak

1220 x 185 x 10,5mm

4  0,7mm



NEW

Diamond Oak

FDY1001

1220 x 185 x 10,5mm

4  0,7mm



NEW

Dark Grey Washed Oak

1220 x 185 x 10,5mm


4  0,7mm



Dark Onyx Oak

FDYK001

1220 x 185 x 10,5mm

4  | 0,7mm



European Smoked Oak

1220 x 185 x 10,5mm

4  | 0,7mm



Chalk Oak

1220 x 185 x 10,5mm

4  | 0,7mm



Provence Oak

1220 x 185 x 10,5mm

4  | 0,7mm



Elegant Oak

1220 x 185 x 10,5mm

4  | 0,7mm




Elegant Dark Oak

1220 x 185 x 10,5mm

4  | 0,7mm





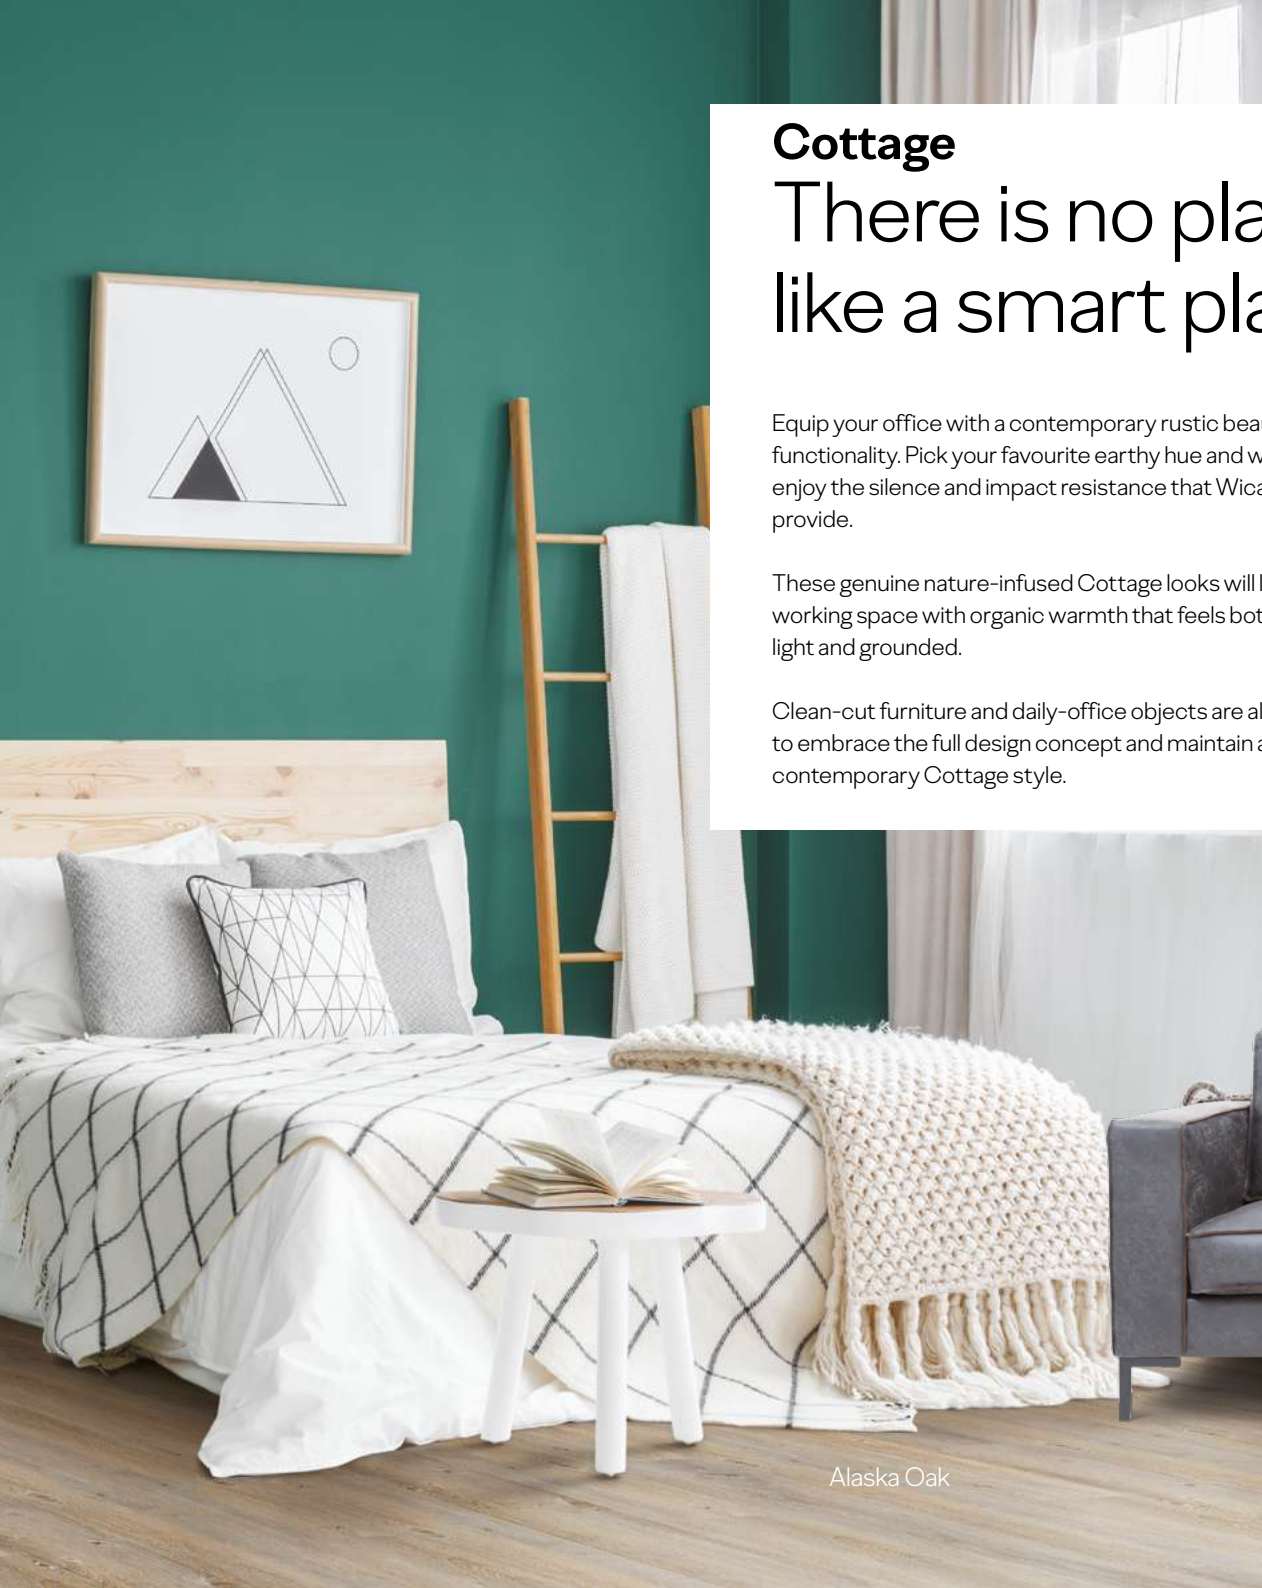

## Cottage

# There is no place like a smart place.

Equip your office with a contemporary rustic beauty and functionality. Pick your favourite earthy hue and wood texture and enjoy the silence and impact resistance that Wicanders products provide.

These genuine nature-infused Cottage looks will layer up your working space with organic warmth that feels both fresh and real, light and grounded.


Clean-cut furniture and daily-office objects are all you need to embrace the full design concept and maintain a balanced contemporary Cottage style.



NEW

### Alaska Oak

1220 x 185 x 10,5mm

4  10,7mm



Alaska Oak



NEW

## European Nature Oak

1220 x 185 x 10,5mm

4  0,7mm



NEW

## Villa Pine

1220 x 185 x 10,5mm

4  0,7mm

European Nature Oak



# Technical solution

PVC-FREE PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE FILM

AGGLOMERATED CORK 1,3MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 2,2MM



## Finishing & Warranty



PVC Free Wear Layer Suitable for Heavy Traffic Residential areas and Heavy Traffic Commercial areas.



# wood hydracork


Hydrocork is a low thickness and waterproof floating solution that combines extreme performance with the comfort of cork. The innovative core made of composite cork is waterproof and incredibly stable, while its surface offers a wear resistance suitable for heavy commercial areas. The product's low thickness makes it also the optimal choice for renovation projects. The revolutionary PressFit compression system allows for a fast and easy installation.

## Formats

1225 x 195 x 6mm  
48 7/32 x 7 11/16 x 1/4"



Century Morocco Pine

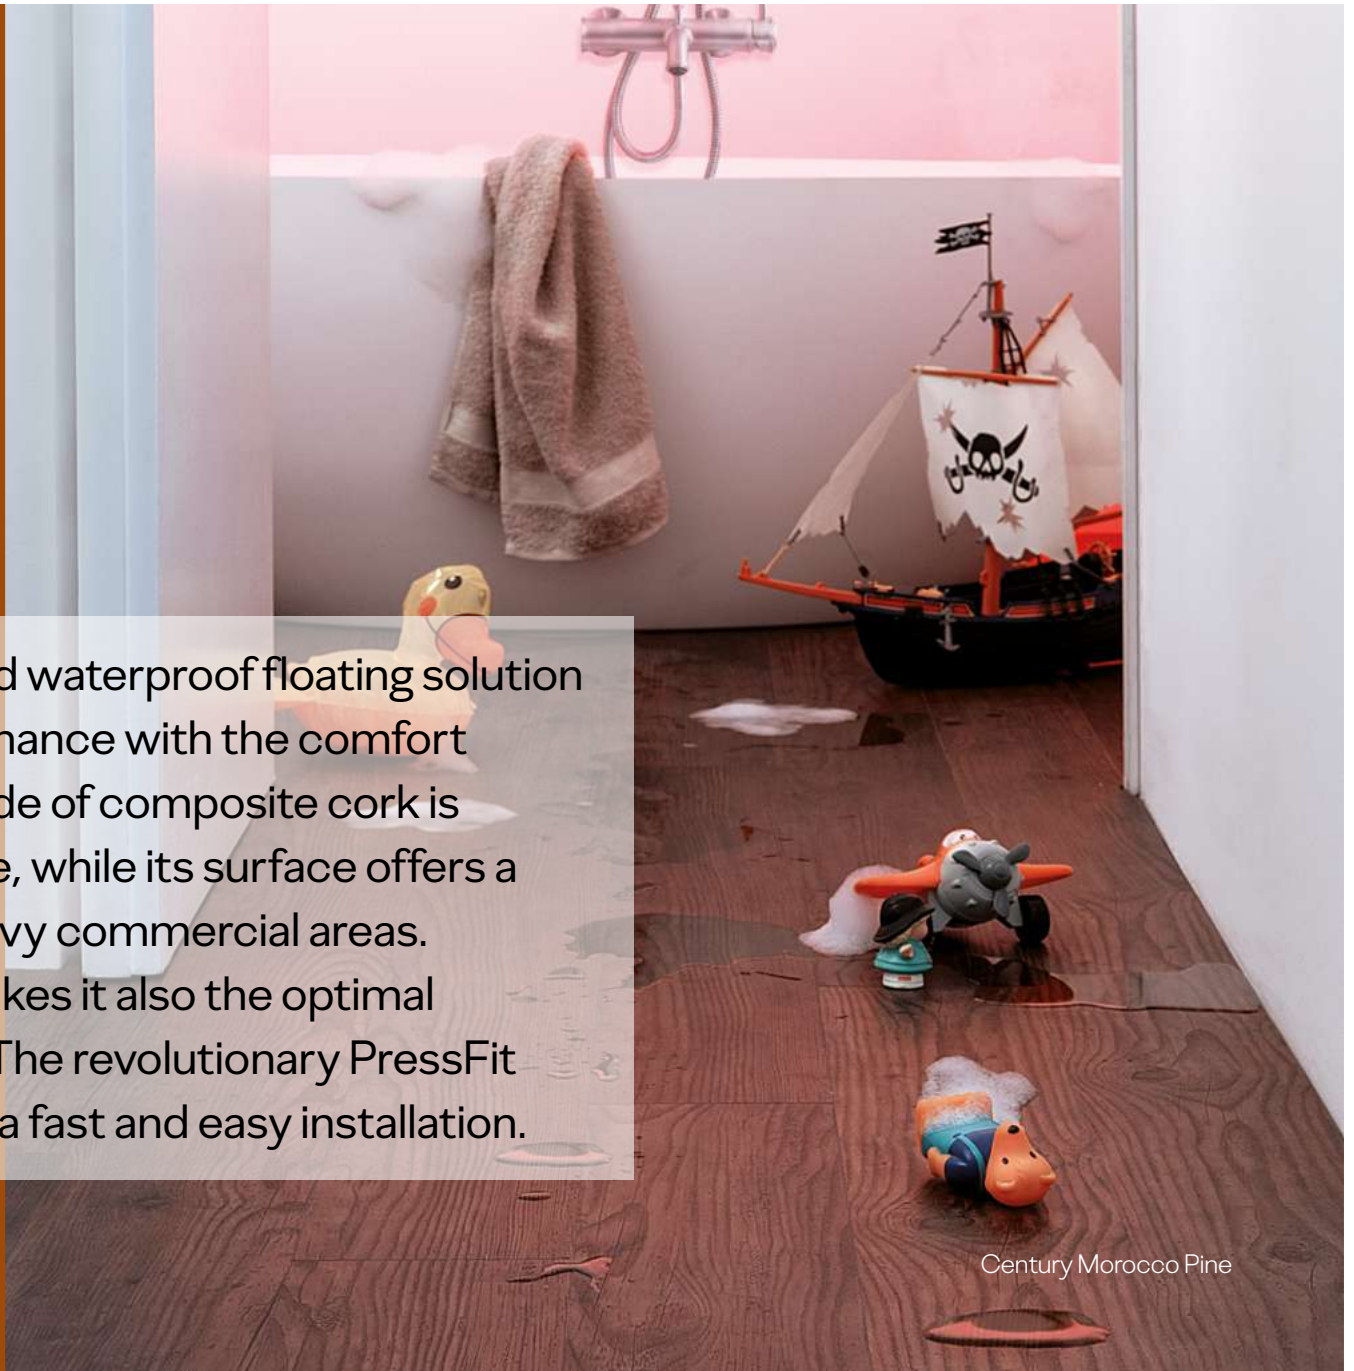





## Reclaimed

Reclaimed wood visuals look great in a commercial space such as a boutique coffee.

The strong antique looking flooring has the ability to add history, character and personality to any space.



Sylvan Gold Oak

B5L8001

1225 x 195 x 6mm

4  0,7mm



Sylvan Brown Oak

B5WQ001

1225 x 195 x 6mm

4  0,7mm



Sawn Bisque Oak

B5P3002

1225 x 195 x 6mm

4  0,7mm



Sawn Twine Oak

B5P2002

1225 x 195 x 6mm

4  0,7mm





## Castle Raffia Oak

B5P0002

1225 x 195 x 6mm

4 M | 0,7mm



## Castle Toast Oak

B5P1002

1225 x 195 x 6mm

4 M | 0,7mm



Castle Toast Oak



## Tradition

# No problem. It's ready for real life.

An open plan kitchen must boast a stylish vibe and sense of wellbeing with measured sobriety.

With Hydrocork, you no longer need to be worried if the floor is able to endure the test of time in a gracious way and how it resists impacts. You don't even need to fear over daily spillings due to its waterproof endurance.

Take advantage of it being ideal for renovations and place it on top of previously existing surfaces, or simply achieve a total look throughout your home with the same look in your kitchen, living room, bathroom and bedrooms.

Ten Traditional wood looks to choose from and complement with industrial, minimalist or even rustic designs.



## European Oak

B5Q2002

1225 x 195 x 6mm

4  0,7mm



## Nature Oak

B5T5002

1225 x 195 x 6mm

4  0,7mm



## Elegant Oak

B5R4002

1225 x 195 x 6mm

4  0,7mm












Sand Oak

B5R1002

1225 x 195 x 6mm

4  | 0,7mm



Wheat Oak

B5WR001

1225 x 195 x 6mm


4  | 0,7mm



Linen Cherry

B5R0002

1225 x 195 x 6mm

4  | 0,7mm



Light Beech

B5T0002

1225 x 195 x 6mm


4  | 0,7mm



Wheat Pine

B5R3002

1225 x 195 x 6mm

4  | 0,7mm



## Nordic

This style is characterized by simple yet rich decor elements. Mixing different clean cut chairs can be the fun approach that will help to provide life without losing the functionality that is part of the Nordic design.



## Arcadian Artic Pine

B5WT001

1225 x 195 x 6mm

4  10,7mm







Arcadian Artic Pine



Claw Silver Oak

B5V3003

1225 x 195 x 6mm

4  0,7mm



Limed Grey Oak

B5T7002

1225 x 195 x 6mm

4  0,7mm



Cinder Oak

B5R7002

1225 x 195 x 6mm

4  0,7mm



Arcadian Soya Pine

B5P4003

1225 x 195 x 6mm

4  0,7mm



Arcadian Rye Pine

B5P5003

1225 x 195 x 6mm

4  0,7mm



Century Fawn Pine

B5P7002

1225 x 195 x 6mm

4  0,7mm



Century Morocco Pine

B5P6002

1225 x 195 x 6mm


4  0,7mm

## Cottage

Places where  
life is celebrated  
every day.

Flooring can either be the focal point of a room, or a background that aggregates other design elements. It's important to have a clear goal in each new design project in order to guarantee a consistent layout. When you've that figured out, it's with ease that you'll be able to extend your personality into your special space.

A bedroom should mirror relaxation and comfortable atmosphere to provide only pleasant moments. For a modern Cottage style that will be wrapped up with flooring as the background, choose a darker flooring hue that will enable the other decor elements to pop up.

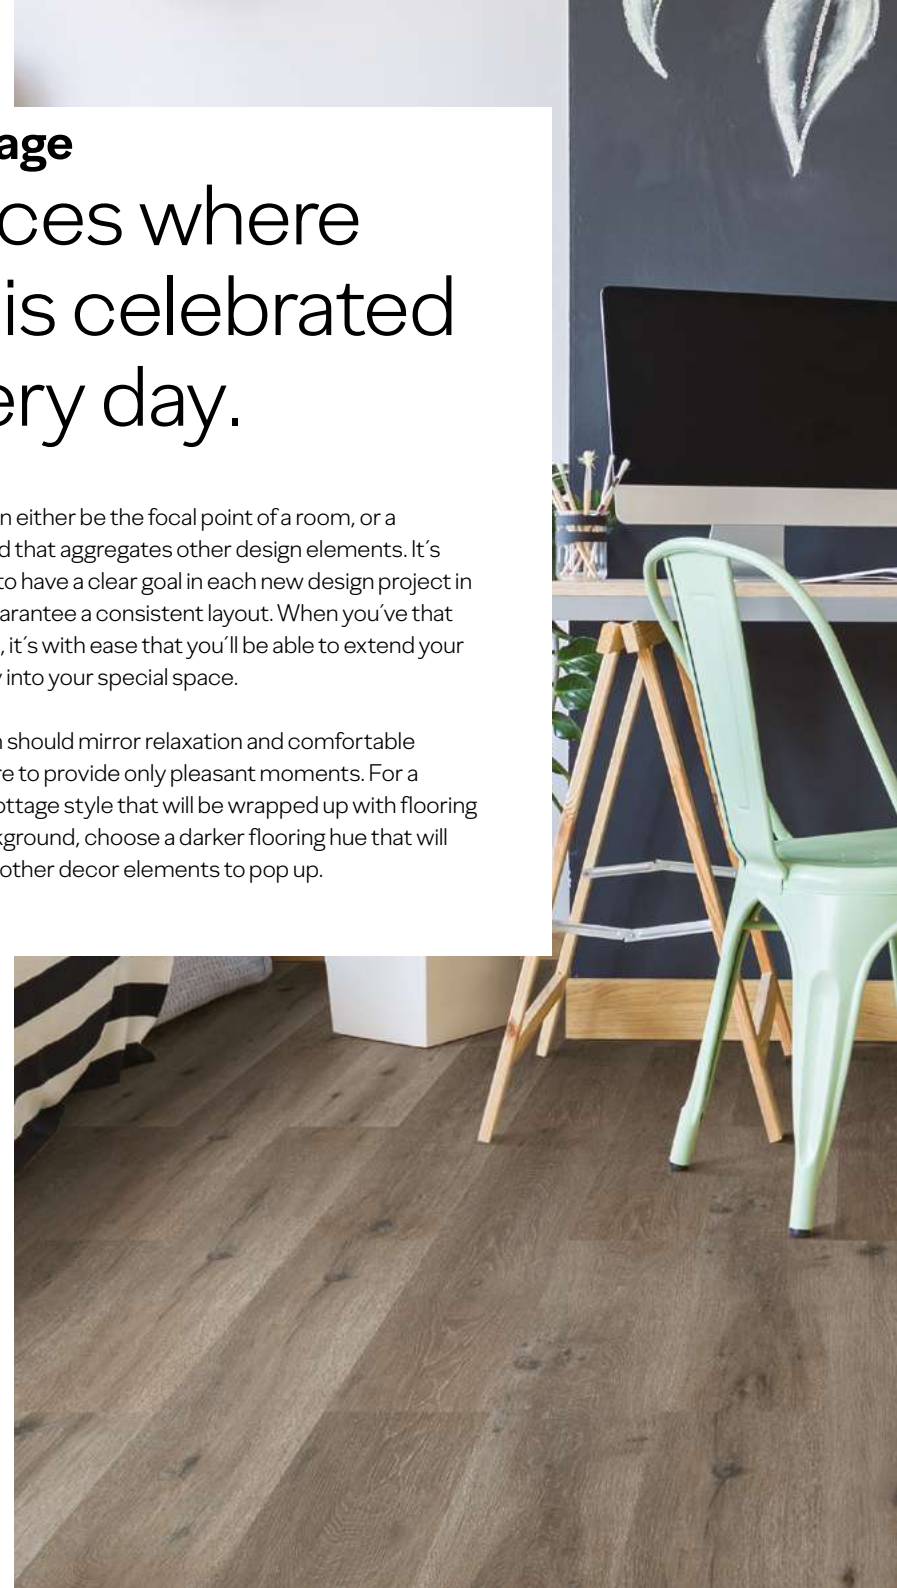





Rustic Fawn Oak



## Rustic Fawn Oak

B5WU001

1225 x 195 x 6mm


4  10,7mm



Alaska Oak

B5Q0002

1225 x 195 x 6mm

4  | 0,7mm



Chalk Oak

B5Q1002

1225 x 195 x 6mm

4  | 0,7mm



Light Dawn Oak

B5WS001

1225 x 195 x 6mm

4  | 0,7mm



Rustic Grey Oak

B5WV001

1225 x 195 x 6mm

4  | 0,7mm





# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK COMPOSITE CORE WITH PRESSFIT 3MM

BALANCING VINYL LAYER



# Finishing & Warranty



Suitable for Heavy Traffic Residential areas and Heavy Traffic Commercial areas.



\*Please see the terms and conditions of Wicanders Limited Warranty on the website.



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



5 POINTS



8 POINTS

Technical Data Sheet

Floating			wood Go		wood Essence
Dimention			1220 x 185 x 10,5mm   48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm   48 x 7 1/4 x 3/8"	1830 x 185 x 11,5mm   72 x 7 1/4x 1/2"
Level of use Domestic	ISO 10874	Class	23	23	23
Level of use Commercial	ISO 10874	Class	31	32	32
Finish Description	--	--	0,2mm Wear Layer	0,3mm Wear Layer	NPC - Polyurethane moisture-curing
	Standard-Test Method	Unit	Specification		
General Properties			EN 14085 + ISO 10582	EN 14085 + EN 649	EN 14085 + EN 12104 + EN 655 + EN 14041
Dimensions: Width Length	EN ISO 24342	mm	± 0,10% up to max. 0,5 max. 2,0	± 0,10% up to max. 0,5 max. 2,0	± 0,10 with max. 0,5 max. 2,0
Overall thickness	EN ISO 24346	mm	± 0,25	± 0,25	Nominal ± 0,25   Maximum deviation from the average ± 0,30
Squareness	EN ISO 24342	mm	≤ 0,50	≤ 0,50	≤ 0,50
Straightness measured at the surface layer	EN ISO 24346	mm	≤ 0,30	≤ 0,30	≤ 0,30
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0	≤ 0,50 / ≤ 1,0	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15	≤ 0,10 / ≤ 0,15	≤ 0,10 / ≤ 0,15
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20	≤ 0,20	≤ 0,15 / ≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20	≤ 0,20	≤ 0,15 / ≤ 0,20
Dimensional stability (humidity)	EN 14085 / EN 669 (Annex C)	%	≤ 5	≤ 5	≤ 5
Mass per unit area	ISO 23997	g/m²	Nominal +13% / -10%	Nominal value (9800) - 10 % + 13%	8000 -/+10%
Colour fastness	ISO 105-BO2	Blue wool scale	≥ 6	≥ 6	--
Apparent density	EN 672	Kg/m³	Nominal value (930) ± 50	Nominal value (900) ± 50	≥ 760 / ≥ 95% nominal value
Classification properties - EN 655 + EN 649 + EN 14085					
Overall thickness (Vinyl + Cork layer)	ISO 24346	mm	--	≥ 3,0	--
Castor Chair	EN 425 / ISO 4918	Visual effect after 25 000 cycles	No disturbance to the surfacen other than slight change in appearance and no delamination shall occur	No disturbance to the surfacen other than slight change in appearance and no delamination shall occur	No disturbance to the surfacen other than slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424 / ISO 16581	Visual effect	No damage shall be visible after testing with a type 2 foot	No damage shall be visible after testing with a type 2 foot	No damage shall be visible when tested with foot type 2
Residual indentation	EN ISO 24343-1	mm	≤ 0,15	≤ 0,15	≤ 0,3
Thermal resistance	EN 12667	(m²K)/W	R <0,112	0,104	R≤ 0.15 (m²K)/W (d)
Safety Properties - EN 14041					
Fire resistance	EN 13501-1	Class	Bfl s1	Bfl s1	Of1 s1
Slip classification	EN 13893	Class	DS	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1	E1
Electrical behaviour	EN 1815	KV	Antistatic	Antistatic	Not Antistatic
Content pentachlorophenol (PCP)	EN 14041 (Annex B) CEN/TR 14823 (Ihd-W 409)	% mg/Kg	Undetectable --	-- PCP free	-- PCP free
Optional Properties					
Stains resistance	ISO 26987 (a)	Grade	Grade 0 (b)	Grade 0 (b)	Grade 0 = unchanged ©
Thermal resistance	EN 12667	(m²K)/W	R <0,112	0,104	R≤ 0.15 (m²K)/W (d)
Impact sound reduction	ISO 140-8	dB (Δ Lw)	16	16	18
Reduction improvement	EPH/IHD Works Standard 431	dB(A)	Reduction improvement 11,4 dB (A) Difference of loudness 45,4%	Reduction improvement 11,4 dB (A) Difference of loudness 45,4%	Reduction improvement 12 dB (A) Difference of loudness 47,5%



wood Resist	wood Resist Eco	wood Hydrocork
1220 x 185 x 10,5mm   48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm   48 x 7 1/4 x 3/8"	1225 x 195 x 6mm   48 7/32 x 7 11/16 x 1/4"
23	23	23
33	33	33
0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer
EN 14085 + EN 649	EN 14085 + ISO 649	ISO 10582 + EN 14085 + EN 14041
± 0,10 up to width: max. 0,5 length: max. 2,0	± 0,10 up to width: max. 0,5 length: max. 2,0	± 0,10 up to max. 0,5 max. 2,0
± 0,25	2,7	± 0,25
≤ 0,50	≤ 0,20	≤ 0,50
≤ 0,30	≤ 0,30	≤ 0,30
≤ 0,50 / ≤ 1,0	≤ 0,50 / ≤ 1,0	≤ 0,50 / ≤ 1,0
≤ 0,10 / ≤ 0,15	≤ 0,10 / ≤ 0,15	≤ 0,10 / ≤ 0,15
≤ 0,20	≤ 0,20	≤ 0,20
≤ 0,20	≤ 0,15	≤ 0,20
≤ 5	≤ 0,25	≤ 5
Nominal value (10150) - 10 % + 13%	Nominal value (9210) - 10 % + 13%	Nominal +13% / -10%
≤ 6	≥ 6	≥ 6
Nominal value (960) ± 50	--	--
≥ 3,0	--	--
No disturbance to the surface other than slight change in appearance and no delamination shall occur	No disturbance to the surface other than slight change in appearance and no delamination shall occur	No disturbance to the surface other than slight change in appearance and no delamination shall occur
No damage shall be visible when tested with foot type 2	No damage shall be visible when tested with foot type 0	No damage shall be visible after testing with a type 0 foot
≤ 0,15	≤ 0,10	≤ 0,1
0,093	≤ 0,11	--
Bfl s1	Cfl-s1	Bfl s1
DS	DS	DS
E1	E1	E1
Antistatic	--	--
-- PCP free	PCP free --	Undetectable --
Grade 0 (b) Iodine grade 2 (b)	--	Grade 0 (b) Iodine grade 2 (b)
0,093	--	0,05
16	17	16 dB
Reduction improvement 11,4 dB (A) Difference of loudness 45,4%	Reduction improvement 9,5 dB (A) Difference of loudness 49%	Reduction improvement 11,1dB Difference of loudness 51,1%

(a) The following products were tested: Desinfectant, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, Citric acid, iodine, petroleum, spirit  
 (b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change  
 \* Except Iodine - Grade 2 - Little change

A photograph of a person's legs from the knees down, wearing grey sweatpants and standing barefoot on a light-colored concrete floor. The person is standing with their feet slightly apart. In the background, there is a modern living room with a grey sofa on the left, a wooden chair with a woven backrest in the center, and a white shelf with books and a potted plant on the right. The lighting is soft and natural, creating a warm and comfortable atmosphere.

**stone**  
Our performance.  
Your comfort.



# stone

## Essence

Floating floor with a multilayered structure composed by the unmatched properties of cork combined with the beauty of selected stone visuals gives to this solution a natural look and feel. The 3,2mm cork top layer will provide an exceptional performance matched with an exceptional thermal and acoustic insulation, as well as a superior walking comfort and a warm atmosphere year round.

### Formats

905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"



Azulejo Celar





NEW

Azulejo Cellar

D89K001  
905 x 295 x 10,5mm



NEW

Azulejo Cityzen

D89I001  
905 x 295 x 10,5mm



NEW

Azulejo Forest

D89J001  
905 x 295 x 10,5mm



NEW

Azulejo Sand

D89H001  
905 x 295 x 10,5mm





Beton Nordic

D88Z001  
905 x 295 x 10,5mm



Beton Midnight

D89C001  
905 x 295 x 10,5mm



Beton Urban

D89A001  
905 x 295 x 10,5mm



Beton Corten

D89B001  
905 x 295 x 10,5mm



Beton Corten



NEW

Concrete Urban

D89E001  
905 x 295 x 10,5mm



NEW

Concrete Midnight

D89G001  
905 x 295 x 10,5mm



NEW

Concrete Nordic

D89D001  
905 x 295 x 10,5mm



NEW

Concrete Corten

D89F001  
905 x 295 x 10,5mm





# Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

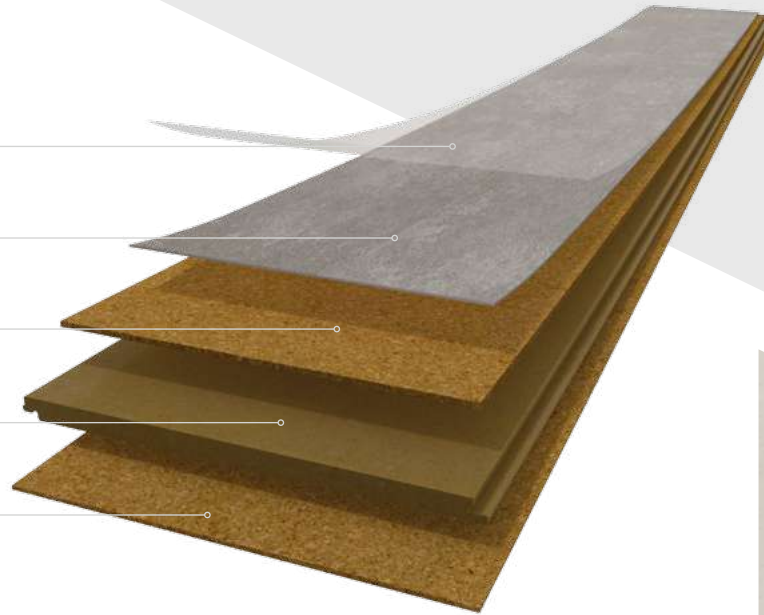

## Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). Due to its chemical reaction during the hot coating process it is extremely wear resistant and highly flexible. This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



# Technical Data Sheet

Floating			stone Essence
Dimention			1830 x 185 x 11,5mm   72 x 7 1/4 x 1/2"
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	32
Finish Description	--	--	NPC - Polyurethane moisture-curing
	Standard-Test Method	Unit	
<b>General Properties</b>			<b>EN 14085 + EN 12104 + EN 655 + EN 14041</b>
Dimensions: Width Length	EN ISO 24342	mm	± 0,10 with max. 0,5 max. 2,0
Overall thickness	EN ISO 24346	mm	Nominal ± 0,25   Maximum deviation from the average ± 0,30
Squareness	EN ISO 24342	mm	≤ 0,50
Straightness measured at the surface layer	EN ISO 24346	mm	≤ 0,30
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,15 / ≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,15 / ≤ 0,20
Dimensional stability (humidity)	EN 14085 / EN 669 (Annex C)	%	≤ 5
Mass per unit area	ISO 23997	g/m <sup>2</sup>	8000 +/-10%
Colour fastness	ISO 105-BO2	Blue wool scale	--
Apparent density	EN 672	Kg/m <sup>3</sup>	≥ 760 / ≥ 95% nominal value
<b>Classification properties - EN 655 + EN 649 + EN 14085</b>			
Overall thickness (Vinyl + Cork layer)	ISO 24346	mm	--
Castor Chair	EN 425 / ISO 4918	Visual effect after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424 / ISO 16581	Visual effect	No damage shall be visible when tested with foot type 2
Residual indentation	EN ISO 24343-1	mm	≤ 0,3
Thermal resistance	EN 12667	(m <sup>2</sup> K)/W	R ≤ 0.15 (m <sup>2</sup> K)/W (d)
<b>Safety Properties - EN 14041</b>			
Fire resistance	EN 13501-1	Class	Of1 s1
Slip classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Electrical behaviour	EN 1815	KV	Not Antistatic
Content pentachlorophenol (PCP)	EN 14041 (Annex B) CEN/TR 14823 (Ihd-W 409)	% mg/Kg	-- PCP free
<b>Optional Properties</b>			
Stains resistance	ISO 26987 (a)	Grade	Grade 0 = unchanged ©
Thermal resistance	EN 12667	(m <sup>2</sup> K)/W	R ≤ 0.15 (m <sup>2</sup> K)/W (d)
Impact sound reduction	ISO 140-8	dB (Δ Lw)	18
Reduction improvement	EPH/IHD Works Standard 431	dB(A)	Reduction improvement 12 dB (A) Difference of loudness 47,5%















(a) The following products were tested: Desinfectant, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, Citric acid, iodine, petroleum, spirit





(b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change

\* Except Iodine - Grade 2 - Little change



# Wicanders' Range

LOOKS				
	cork	wood	stone	
RANGE	Go	 	—	
	Essence	     		
	Resist	—	 	—
	Resist <sup>ECO</sup>	—	 	—
	Hydrocork	—	 	—

 Heavy Traffic Residential areas
  Moderate Traffic Commercial areas
  Medium Traffic Commercial areas
  Heavy Traffic Commercial areas

The sample images presented in this brochure are cut from larger pieces. Decor and shade may vary slightly.

---

**Amorim Cork Flooring, S.A.**

Rua do Ribeirinho 202 - P.O. Box 13

4536-907 S. Paio de Oleiros - Portugal

T. +351 22 747 56 00 E. [info.acf@amorim.com](mailto:info.acf@amorim.com)

---

[www.wicanders.com](http://www.wicanders.com)

DE	Amorim Deutschland GmbH (+49) 4221 5 93-01	<a href="mailto:info.acf.de@amorim.com">info.acf.de@amorim.com</a>
BE NE LUX	Amorim Benelux B.V. (+31) 166 604 111	<a href="mailto:info.acf.bnl@amorim.com">info.acf.bnl@amorim.com</a>
AT	Amorim Deutschland GmbH (+43) 1 54 51 65 10	<a href="mailto:info.acf.at@amorim.com">info.acf.at@amorim.com</a>
CH	Amorim Flooring Switzerland AG (+41) 41 726 20 20	<a href="mailto:info.acf.ch@amorim.com">info.acf.ch@amorim.com</a>
PT	Amorim Cork Flooring, S.A. (+351) 227 475 600	<a href="mailto:info.acf@amorim.com">info.acf@amorim.com</a>
ES	Amorim Cork Flooring, S.A. (+351) 227 475 600	<a href="mailto:info.acf.es@amorim.com">info.acf.es@amorim.com</a>
FR	Amorim Cork Flooring, S.A. (+33) 800 914 848	<a href="mailto:info.acf.fr@amorim.com">info.acf.fr@amorim.com</a>
DK	Timberman Denmark A/S (+45) 995 252 52	<a href="mailto:timberman@timberman.dk">timberman@timberman.dk</a>
PL	Dom Korkowy, Sp. z o.o. (+48) 126 379 639	<a href="mailto:krakow@domkorkowy.pl">krakow@domkorkowy.pl</a>
US	Amorim Flooring North America (+1) 410 553 60 62	<a href="mailto:info.acf.us@amorim.com">info.acf.us@amorim.com</a>
RU	Amorim Flooring Rus, OOO (+7) 495 280 7860	<a href="mailto:info.acf.ru@amorim.com">info.acf.ru@amorim.com</a>
IT	Amorim Cork Flooring, S.A. (+39) 800 790 805	<a href="mailto:info.acf.it@amorim.com">info.acf.it@amorim.com</a>
FI	Korkkitrio Oy (+358) 50 554 2616	<a href="mailto:wicandersmyynti@korkkitrio.fi">wicandersmyynti@korkkitrio.fi</a>
SW	Amorim Flooring Sweden (+46) 311 077 40	<a href="mailto:info.acf.se@amorim.com">info.acf.se@amorim.com</a>

---

**AMORIM**